

---

# WILLKOMMEN AUF UNSEREM TERRAIN

---


► Produktinformation Bogiebänder




TRACTION

ALL-ROUND


FLOTATION

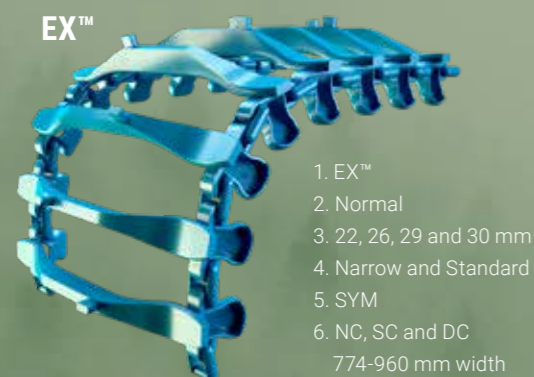



- 1. EX™
- 2. Normal
- 3. 22, 26, 29 and 30 mm
- 4. Narrow and Standard
- 5. SYM
- 6. NC, SC and DC
- 774-960 mm width

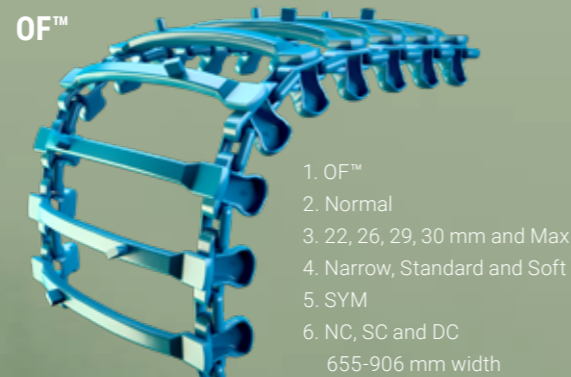


- 1. OF™
- 2. Normal
- 3. 22, 26, 29, 30 mm and Max
- 4. Narrow, Standard and Soft
- 5. SYM
- 6. NC, SC and DC
- 655-906 mm width




- 1. EVO™
- 2. Normal
- 3. 22, 26, 29, 30 mm and Max
- 4. Narrow, Standard and Soft
- 5. SYM
- 6. NC, SC and DC
- 695-960 mm width

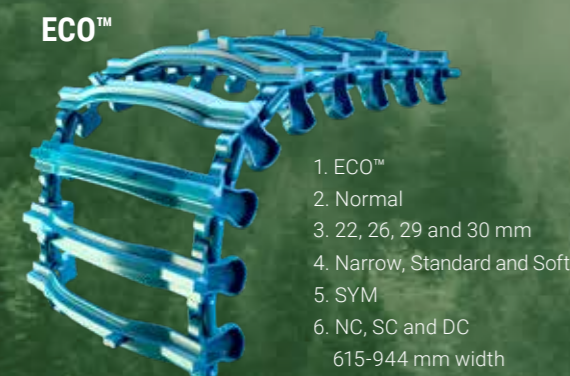


- 1. ECO™
- 2. Normal
- 3. 22, 26, 29 and 30 mm
- 4. Narrow, Standard and Soft
- 5. SYM
- 6. NC, SC and DC
- 615-944 mm width

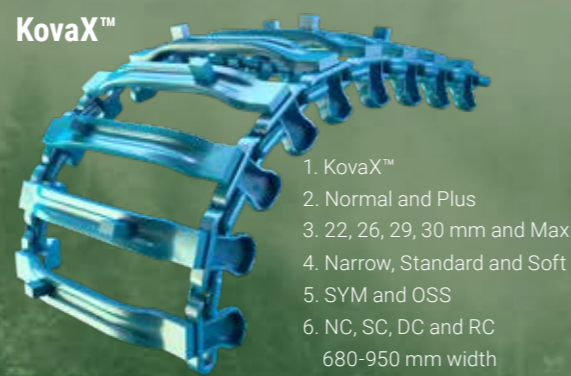


- 1. KovaX™
- 2. Normal and Plus
- 3. 22, 26, 29, 30 mm and Max
- 4. Narrow, Standard and Soft
- 5. SYM and OSS
- 6. NC, SC, DC and RC
- 680-950 mm width

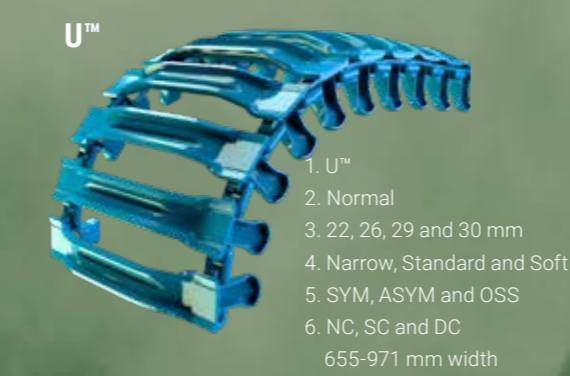



- 1. U™
- 2. Normal
- 3. 22, 26, 29 and 30 mm
- 4. Narrow, Standard and Soft
- 5. SYM, ASYM and OSS
- 6. NC, SC and DC
- 655-971 mm width




- 1. Baltic™
- 2. Light and Normal
- 3. 22, 26, 29 and 30 mm
- 4. Narrow, Standard and Soft
- 5. SYM, ASYM and OSS
- 6. NC, SC, DC and RC
- 650-1210 mm width



- 1. CoverB™
- 2. Light and Normal
- 3. 22, 26, 29 and 30 mm
- 4. Narrow, Standard and Soft
- 5. SYM, ASYM and OSS
- 6. NC, SC, DC and RC
- 670-1220 mm width

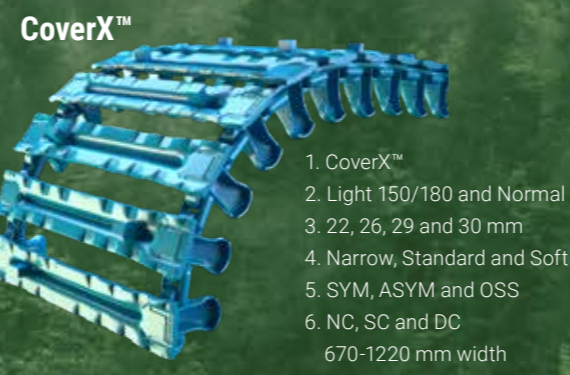

- 1. CoverX™
- 2. Light 150/180 and Normal 150/180
- 3. 22, 26, 29 and 30 mm
- 4. Narrow, Standard and Soft
- 5. SYM, ASYM and OSS
- 6. NC, SC and DC
- 670-1220 mm width




**1. Cross member - Profile**



**2. Cross member type - Light, Normal and Plus**

**3. Link system**


22 – 26 – 29 – 30 and Max

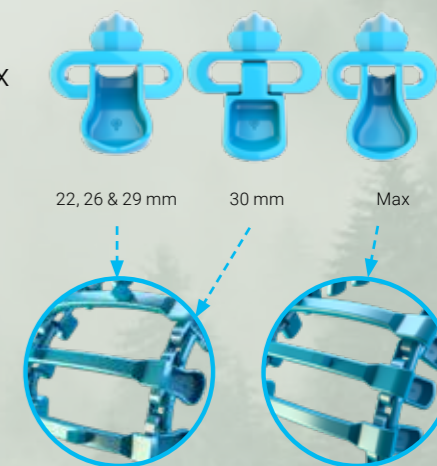

**4. Version**




**5. Position**

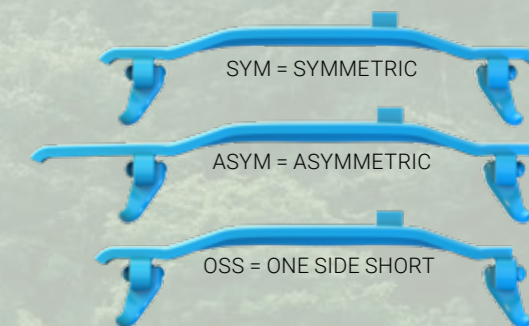

**6. Cleat**

- NC = No Cleat
- SC = Single Cleat
- DC = Double Cleat
- RC = Road Cleat

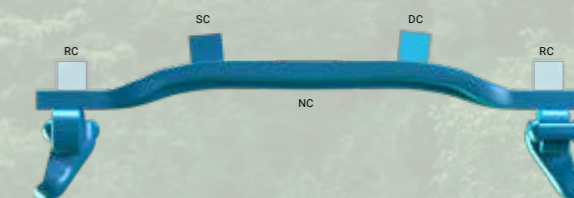

**Combination track profiles** – Bogie tracks with different cross-members on the same Track.  
Contact your local Olofsfors office to request other options and/or dimensions.



## TRAKTION


### EX™



1. EX™ - CTL
  2. Normal
  3. 22 und 26 mm
  4. Narrow und Standard
  5. SYM
  6. NC, SC und DC
- 774-960 mm Breite




### OF™

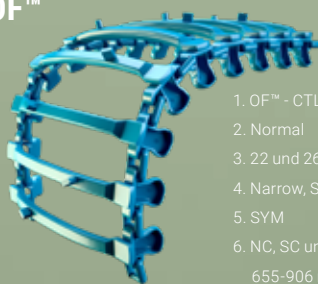

1. OF™ - CTL
  2. Normal
  3. 22 und 26 mm
  4. Narrow, Standard und Soft
  5. SYM
  6. NC, SC und DC
- 655-906 mm Breite



### EVO™

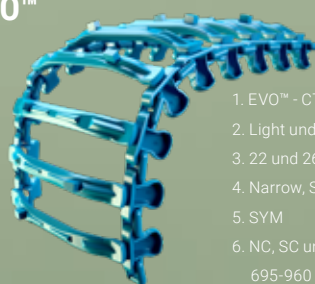

1. EVO™ - CTL
  2. Light und Normal
  3. 22 und 26 mm
  4. Narrow, Standard und Soft
  5. SYM
  6. NC, SC und DC
- 695-960 mm Breite



### ECO™



1. ECO™ - CTL
  2. Normal
  3. 22 und 26 mm
  4. Narrow, Standard und Soft
  5. SYM
  6. NC, SC und DC
- 615-944 mm Breite



### KovaX™



1. KovaX™ - CTL
  2. Normal und Plus
  3. 22 und 26 mm
  4. Narrow, Standard und Soft
  5. SYM und OSS
  6. NC, SC und DC
- 680-950 mm Breite



### Baltic™



1. Baltic™ - CTL
  2. Light und Normal
  3. 22 und 26 mm
  4. Narrow, Standard und Soft
  5. SYM, ASYM und OSS
  6. NC, SC, DC und RC
- 650-1210 mm Breite



## ALL-ROUND

## TRAGFÄHIGKEIT

### Skidder Wheel Tracks™

